

AlGaAs Infrared Laser Diode

ADL-85051TL

6-2D-LD85-004 Rev.02

850nm 5mW 5.6 ϕ TO-Type Laser Diode

•Features


1. Low operation current
2. Cost effective

•Applications

1. Bar-code scanner
2. Laser printer
3. Military

•Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P_O	CW	5	mW
Reverse voltage (LD)	V_{RL}	-	3.5	V
Reverse voltage (PD)	V_{RD}	-	30	V
Forward current (PD)	I_{FD}	-	10	mA
Case temperature	T_C	-	-10~+50	$^{\circ}\text{C}$
Storage temperature	T_S	-	-40~+85	$^{\circ}\text{C}$

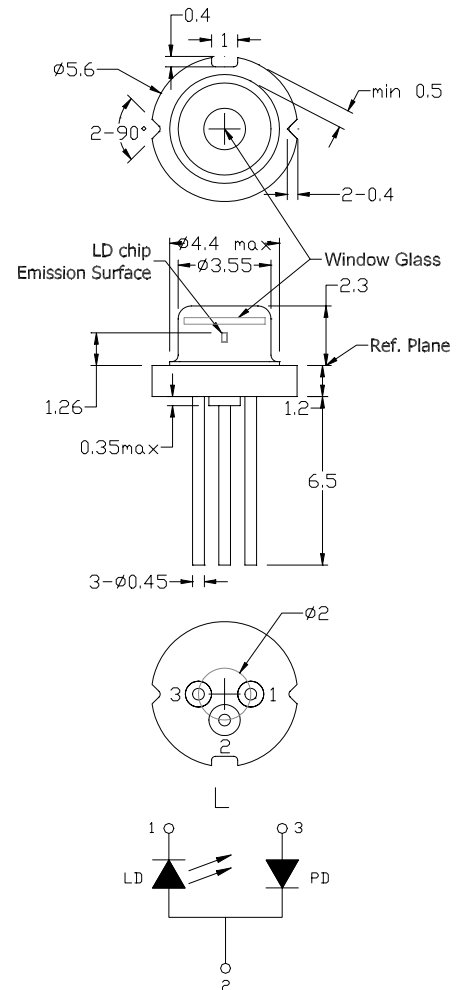

•Electrical and optical characteristics ($T_c=25^{\circ}\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	840	845	850	nm	$P_o=5\text{mW}$
Threshold current	I_{th}	-	19	25	mA	
Operating current	I_{op}	-	26	35	mA	$P_o=5\text{mW}$
Operating voltage	V_{op}	-	1.8	2.0	V	$P_o=5\text{mW}$
Differential efficiency	η	0.5	0.9	1.1	mW/mA	$P_o=3\sim 5\text{mW}$
Monitor current	I_m	0.4	0.6	0.8	mA	$P_o=5\text{mW}, V_{RD}=5\text{V}$
Parallel divergence angle	$\theta_{ }$	6	9	14	degree	$P_o=5\text{mW}$
Perpendicular divergence angle	$\theta_{\perp}$	27	32	36	degree	
Parallel FFP deviation angle	$\Delta\theta_{ }$	-3	-	+3	deg	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	-	+3	deg	
Emission point accuracy	$\Delta x \Delta y$	-80	-	+80	um	
	ΔZ	-40	-	+40	um	

•Precautions

- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

* For reference only. Contents above are subject to change without notice.

Arima
LASERS

